



Purchasing Department

Lucky Gupta - Procurement Supervisor
Will Tibben – Procurement Specialist
Pauline Baker -Procurement Specialist

220 Portsmouth Ave., Kingston, ON K7M 0G2

P: 613-544-6920 | F: 613-544-8569

TF: 1-800-267-0935 | TTY: 613-548-0279

www.limestone.on.ca

Addenda No. 3

Window & Door Replacement at JG Simcoe Public School

RFQ 22-04

Friday, November 19, 2021, 8:34 AM


No. of pages: 2

Question 1:

Please confirm if we have to carry a pre-qualified mechanical subcontractor to drain, cut, re-install, re-insulate refill and re-start the hydronic system. Please confirm the number of pipes shown on the document is accurate. Please confirm the diameter and nature of pipes to be cut.

Answer 1:

As a result of internal discussions, the scope of work related to disconnection and reconnection of the hydronic piping is being deleted from the scope of this project. In order to install the millwork counter/windowsill, the contractor will be required to splice the countertop down the center of all penetrations in order to sandwich the penetration. Existing vinyl wrapped pipe insulation is to be removed and replaced as required to complete the work. Refer to following sketch.

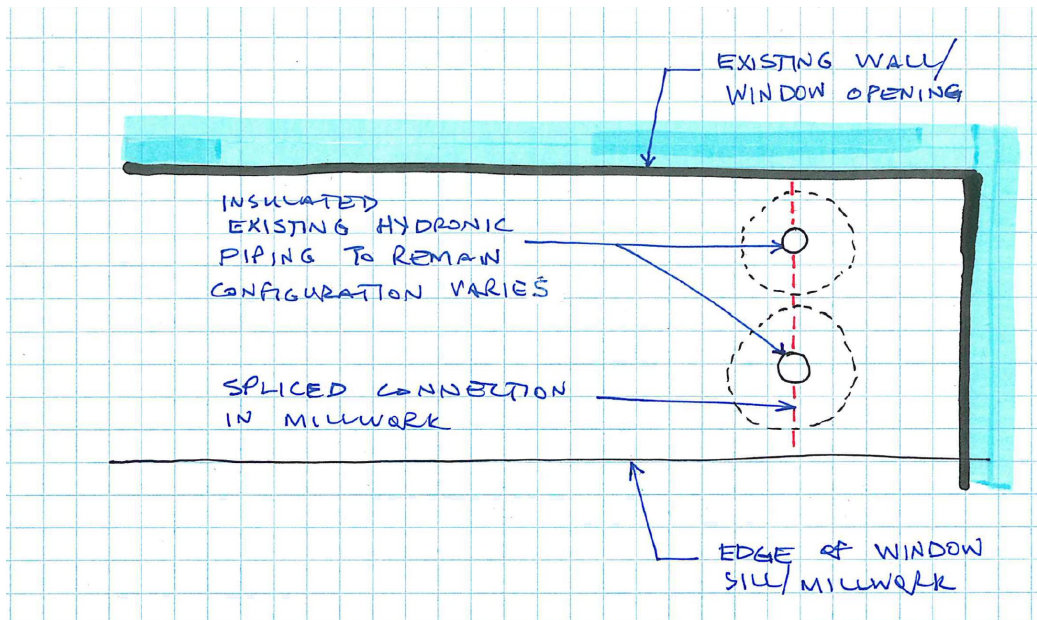

Question 2:

There are no notes about millwork removals, is it the intent that our new millwork counter to be installed over the existing counter?

Answer 2:

The existing windowsill millwork is to be removed prior to installation of the new windowsills. The existing sills are approximately the same size and configuration as the new ones.

Question 3:

Please confirm what removals are required at doors D1 & D2. Are these new openings?

Answer 3:

Removals at D01 and D02 are limited to the existing hollow metal doors and grout filled frames. The openings are existing and the existing brick and precast are to remain unchanged by the project. The contractor is responsible for all damage to existing materials to remain.

End of Addendum